

## DATASHEET

---

The medium-sized, radiolucent Ambu BlueSensor QR ECG Electrode, features conductive wet gel, suitable adhesion and a large measuring area, which ensures stable signal quality throughout the monitoring period.

As the QR ECG Electrode is radiolucent, there is no need for removal and subsequent replacement of electrodes during X-ray procedures.

Thanks to the special occlusive backing material, the electrode is resistant to liquids.


### Key benefits

- Conductive wet gel lowers skin impedance effectively and immediately
- Adhesive is suitable for short-term application
- Occlusive backing material is resistant to fluids
- Ag/AgCl sensor ensures stable signal quality
- Radiolucency allows the electrode to remain on the patient during X-ray procedures


# Ambu® BlueSensor QR

ECG Electrode

Single use

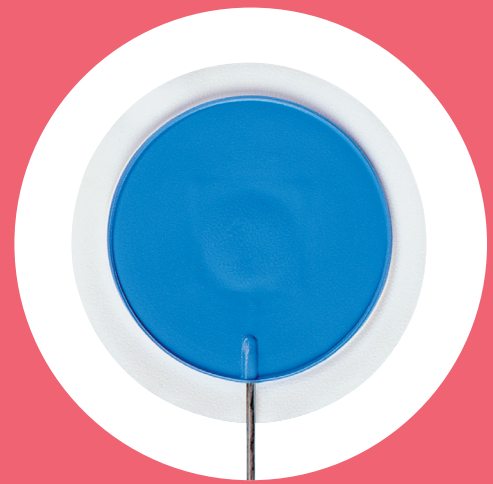

Wet gel



Polymer backing



Silver sensor



Radiolucent



Occlusive backing

**BlueSensor**

**Ambu**

## SPECIFICATIONS

### Dimensions

Electrode size (diameter in mm)	40
Skin contact size (diameter in mm)	40
Adhesive area (in mm <sup>2</sup> )	1002

### Sensor

Sensor material	Silver/silver chloride (Ag/AgCl)
Gel system	Wet gel
Gel area (in mm <sup>2</sup> )	254

### Electrical Data (ANSI/AAMI)

AC impedance - typical	1660 Ω
DC offset voltage - typical	11.8 mV
Defibrillation overload recovery - typical	18.28 mV
Rate of change of polarisation potential - typical	- 0.18 mV/s
Combined offset instability and internal noise	25.8 μV
Bias current tolerance (over 8 hours)	19.4 mV

## MATERIALS

### Electrode

Bio-compatible	Yes
Sponge	Polyurethane foam (PUR)
Backing material	Polyvinyl chloride film (PVC)
Skin adhesive	Acrylate
Lead wire core	Carbon
Lead wire insulation	Polyvinyl chloride (PVC)
Lead wire connector	Brass/polypropylene (PP)
Release liner	Polyester/polyethylene film (PET/PE)

### Environment

Electrode is not made with natural rubber latex	
Wire is not made with natural rubber latex	
Packaging is PVC-free	

### X-ray & MRI

Radiolucent	Yes
MR Conditional	No

### Shelf Life

Opened pouches	1 month
Unopened pouches*	24 months

\*from date of production.

## CONNECTORS



A = 4 mm connector

### Packaging

Pouch (outer/middle/inner layers)	Polyester/Aluminium/Polyethylene
Boxes	Cardboard

### Options

Pre-wired connectors	A
----------------------	---

### Precaution

Single use only

## AVAILABLE CONFIGURATIONS

Product Code	Units/liner	Units/pouch	Units/inner box	Units/outer box
QR-50-A/10	1	10	500	1000
QR-80-A/10	1	10	500	1000

QR-50-A ■ Product ■ Wire length ■ Connector

# Ambu

### Ambu Australia Pty Ltd

Unit 5, 2 Daydream Street  
Warriewood  
NSW 2102  
Tel: 1300 233 118  
aussales@ambu.com  
www.ambuaustralia.com.au

